

CMC-18G26G-3331-K is a wideband medium power amplifier providing up to 31 dBm and a gain of 33 dB. The compact size and modularity makes it ideal for a wide range of applications.

Features:

- Frequency Range: 18.0 to 26.5 GHz
- P1dB: 31 dBm Typ
- Flat Small Signal Gain: 33 dB Typ
- Small size, low cost
- Unconditionally Stable


Specifications:


Frequency:	18.0-26.5 GHz
Gain:	33 dB Typ, 30 dB Min
Gain Flatness:	± 1.8 dB Max
Noise Figure:	5.0 dB Typ, 6.0 dB Max
Output P1dB:	31 dBm Typ, 30 dBm Min
Output IP3:	38 dBm Typ
VSWR Input:	1.5:1 Typ, 1.7:1 Max
VSWR Output:	1.6:1 Typ, 1.8:1 Max
Reverse Isolation:	60 dB Typ
Non-Harmonic Spurious:	-60 dBc Max
DC Voltage:	+8 V to +12 V DC
DC Supply Current:	1800 mA Typ

Environmental Ratings:

Temperature:	-40°C to +75 °C Operating -55 °C to +125 °C Non-Operating
Vibration:	MIL-STD-202F, Method 204D Cond. B
Altitude:	MIL-STD-202F, Method 105C Cond. B
Temperature Cycle:	MIL-STD-202F, Method 107D Cond. A


Mechanical Outline(Inches) :

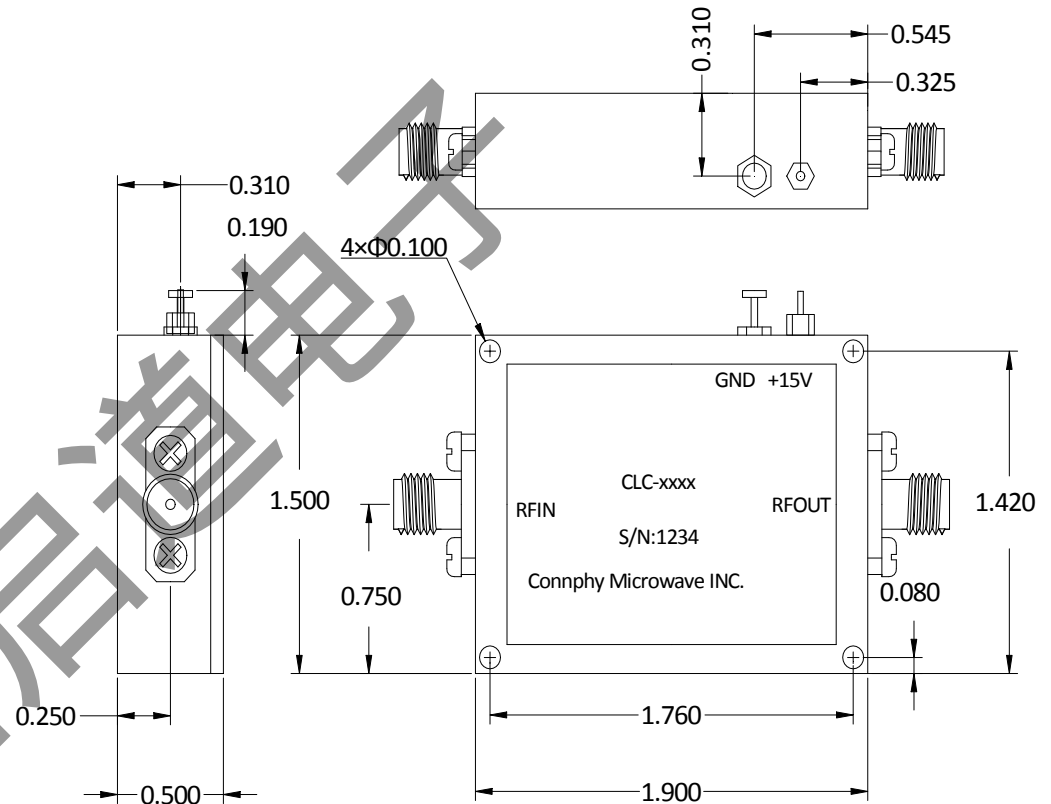


Medium Power Amplifier CMC-18G26G-3331-K			
DRAWN:	DWG NO.:	REV CODE: Rev.1.0	 www.connphy.com sales@qidadao.com
CHECKRD:	DATE: 12/10/15	SHEET : 1 OF 2	
ISSUED:	SIZE: A	SCALE : N / A	
			Notes: SPEC ARE SUBJECT TO CHANGE WITHOUT NOTICE.

Typical Performance Data:


Gain S21

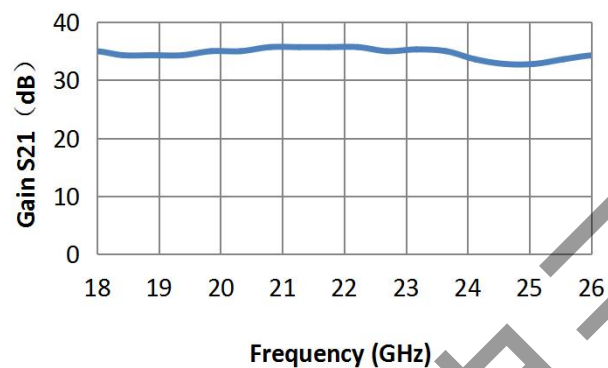


S11

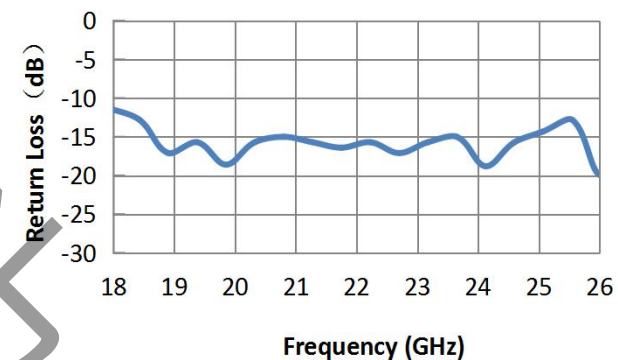

S22

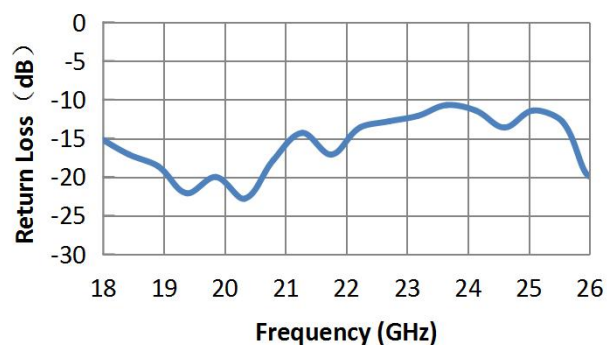

OP1dB

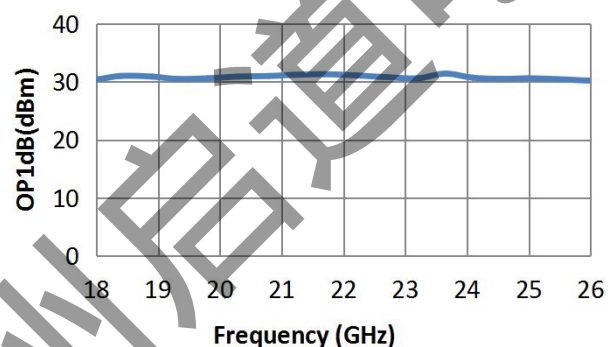

Note: Test data taken with case temperature of +23 °C

Environmental Ratings:


Temperature: -40°C to +75 °C Operating
 -55 °C to +125 °C Non-Operating

Vibration: MIL-STD-202F, Method 204D Cond. B

Altitude: MIL-STD-202F, Method 105C Cond. B

Temperature Cycle: MIL-STD-202F, Method 107D Cond. A

Medium Power Amplifier CMC-18G26G-3331-K

DRAWN:	DWG NO.:	REV CODE: Rev.1.0	 www.connphy.com sales@connphy.com
CHECKRD:	DATE: 12/10/15	SHEET : 2 OF 2	
ISSUED:	SIZE: A	SCALE : N / A	
			Notes: SPEC ARE SUBJECT TO CHANGE WITHOUT NOTICE.