

**CMP-18G26.5-3033-K** is a wideband medium power amplifier providing up to 33 dBm and a gain of 30 dB. The compact size and modularity makes it ideal for a wide range of applications.

**Features:**

- Frequency Range: 18 to 26.5 GHz
- P1dB: 33 dBm Min
- Flat Small Signal Gain: 30 dB Min
- Small size, low cost
- Unconditionally Stable


**Specifications:**


Frequency:	18.0-26.5 GHz
Gain:	30 dB Min
Gain Flatness:	± 2.0 dB Max
Noise Figure:	7.0 dB Max
Output P1dB:	33 dBm Min
Output IP3 :	42 dBm Typ
VSWR Input:	2.0:1 Max
VSWR Output:	2.0:1 Max
DC Voltage:	+15 V Typ
DC Supply Current:	2800 mA Typ
RF Connectors:	2.92mm Female

**Environmental Ratings:**

Temperature:	-40°C to +75 °C Operating -55 °C to +125 °C Non-Operating
Vibration:	MIL-STD-202F, Method 204D Cond. B
Altitude:	MIL-STD-202F, Method 105C Cond. B
Temperature Cycle:	MIL-STD-202F, Method 107D Cond. A


**Mechanical Outline(Inches):**

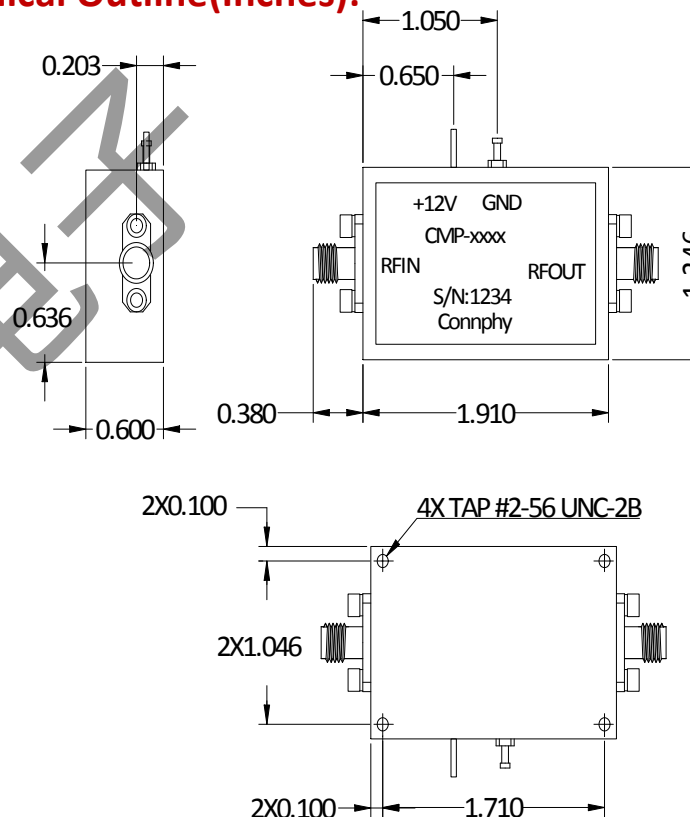


Medium Power Amplifier CMP-18G26.5-3033-k			
DRAWN:	DWG NO.:	REV CODE: Rev.1.0	 <a href="http://www.connphy.com">www.connphy.com</a> <a href="mailto:sales@qiidao.com">sales@qiidao.com</a>
CHECKRD:	DATE: 15/07/15	SHEET : 1 OF 2	
ISSUED:	SIZE: A	SCALE : N / A	
			Notes: SPEC ARE SUBJECT TO CHANGE WITHOUT NOTICE.

## Mechanical Outline(Inches):


### Gain S21

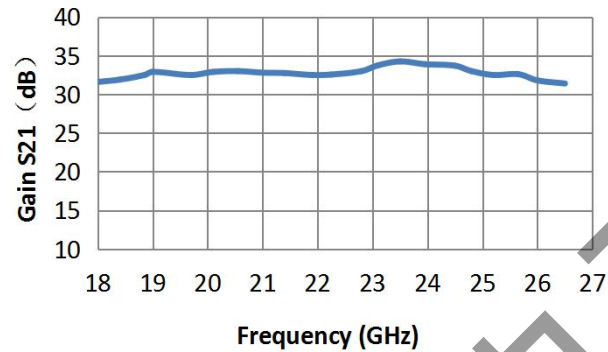


### S11

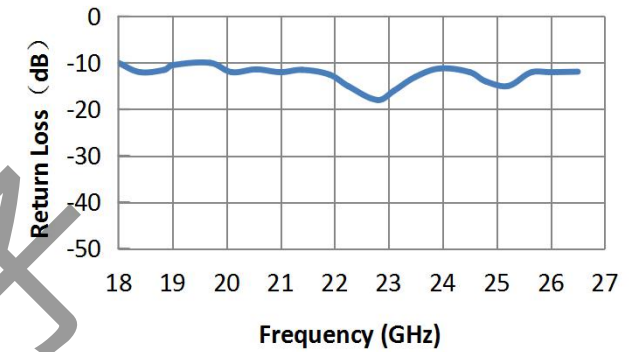

### S22

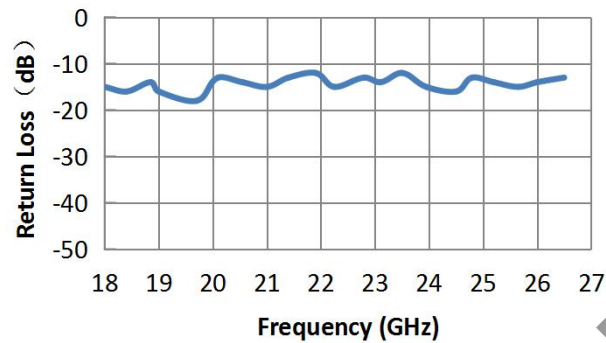

### Output P1dB

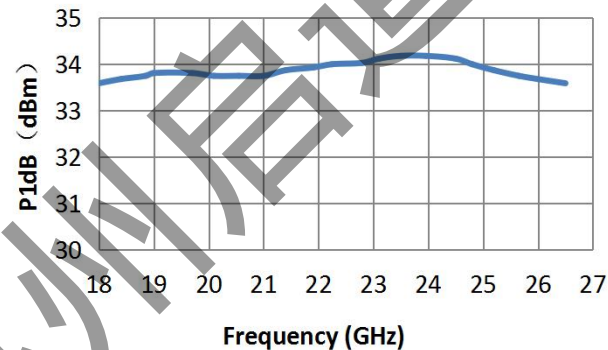

## Environmental Ratings:

Temperature:	-40°C to +75 °C Operating -55 °C to +125 °C Non-Operating
Vibration:	MIL-STD-202F, Method 204D Cond. B
Altitude:	MIL-STD-202F, Method 105C Cond. B
Temperature Cycle:	MIL-STD-202F, Method 107D Cond. A

### Medium Power Amplifier CMP-18G26.5-3033-k

DRAWN:	DWG NO.:	REV CODE: Rev.1.0
CHECKRD:	DATE: 15/07/15	SHEET : 2 OF 2
ISSUED:	SIZE: A	SCALE : N / A

**CONNPHY**  
Microwave Inc.

[www.connphy.com](http://www.connphy.com)  
[sales@qiidao.com](mailto:sales@qiidao.com)

Notes: SPEC ARE SUBJECT TO  
CHANGE WITHOUT NOTICE.