

## FMR Series

## 950-1500MHz Input Frequency Tripler

### Features

- Input Frequency: 950 – 1500MHz
- Output Frequency: 2850 – 4500MHz
- Conversion Gain: 9dB
- F0 Isolation: 20dB
- Input Drive Level: 0dBm
- DC Power: +12V
- SMA Connector

Performance@1200MHz, Pin= 0dBm

### Description

FMR-3-6 is an active frequency tripler operates with input frequency range from 950 to 1500MHz and output frequency range from 2850 to 4500MHz.

### Picture





### Electrical Specifications @ +25 °C, $Z_{IN} = Z_{OUT} = 50\Omega$ , $P_{IN} = 0\text{dBm}$ , +12V

Parameter	Unit	Min.	Typ.	Max.
Input Frequency Range	MHz	950		1500
Output Frequency Range	MHz	2850		4500
Conversion Gain	dB	5	9	
F0 Isolation *	dB	10	20	
2F0 Isolation *	dB	15	25	
4F0 Isolation *	dB	20	30	
VSWR Input @ 1200MHz			1.1:1	1.5:1
Output @ 3600MHz			1.6:1	2.5:1
DC Supply Voltage	V	10	12	15
Operating Current	mA		150	170

\* Isolation with respect to output power level



## FMR Series

## 950-1500MHz Input Frequency Tripler

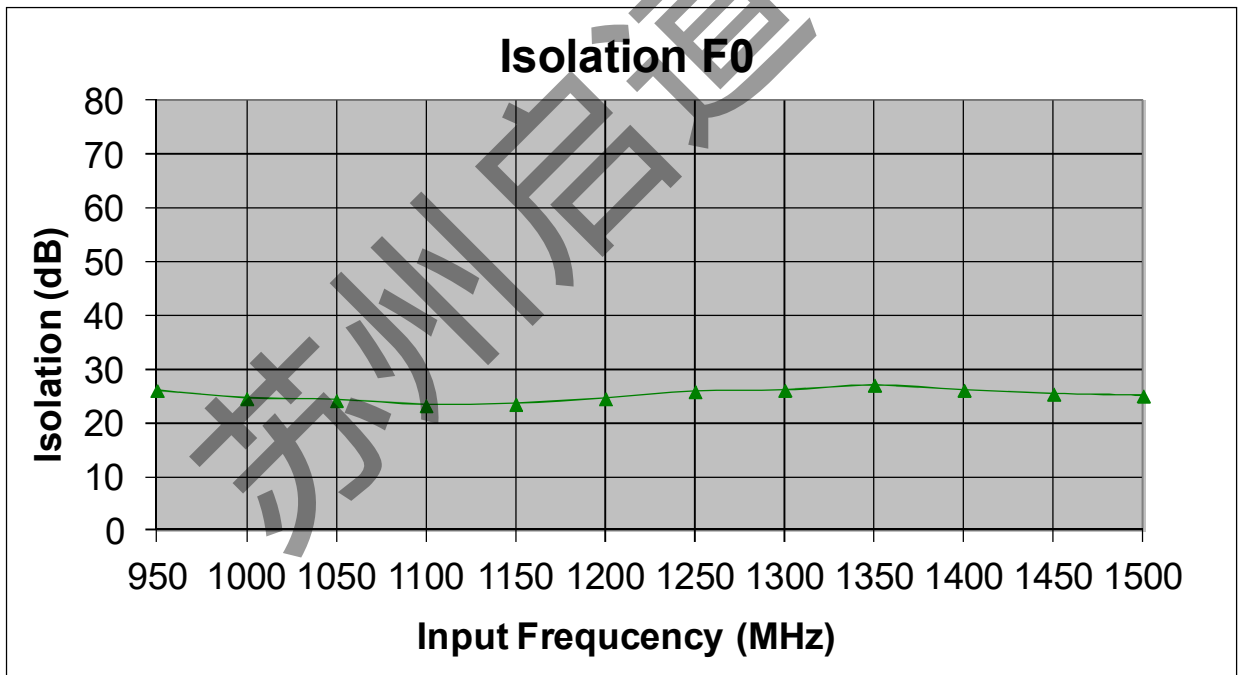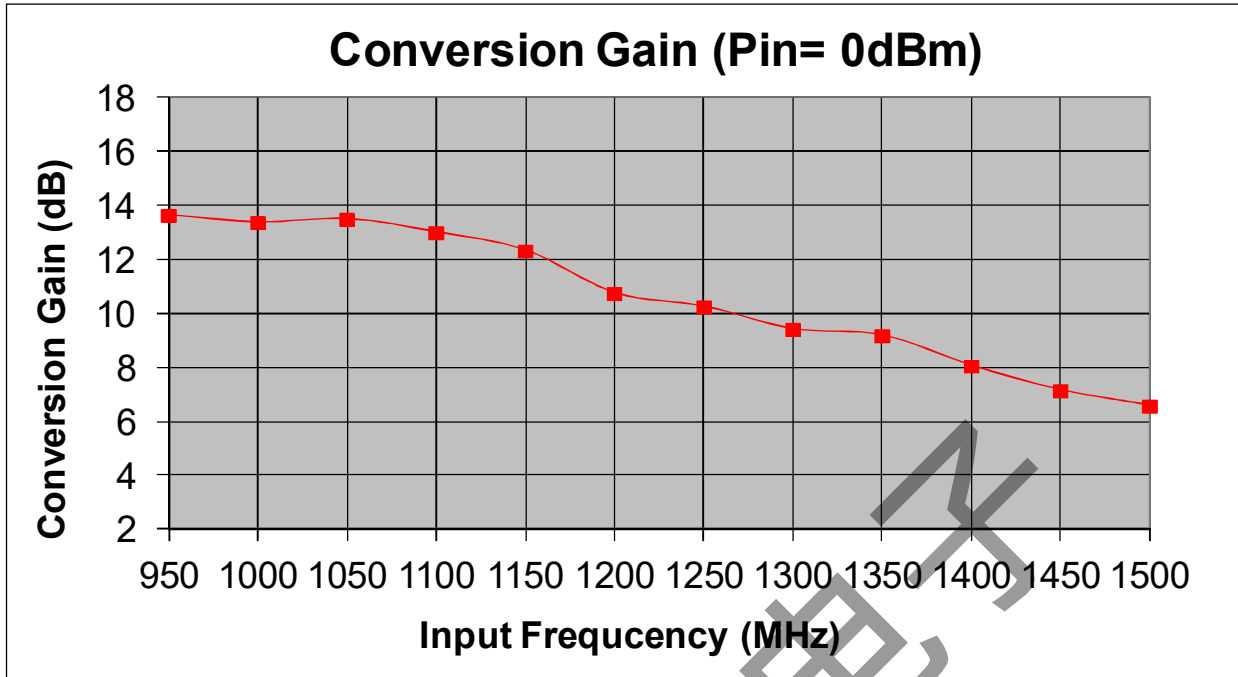

**FMR Series**


**950-1500MHz Input Frequency Tripler**

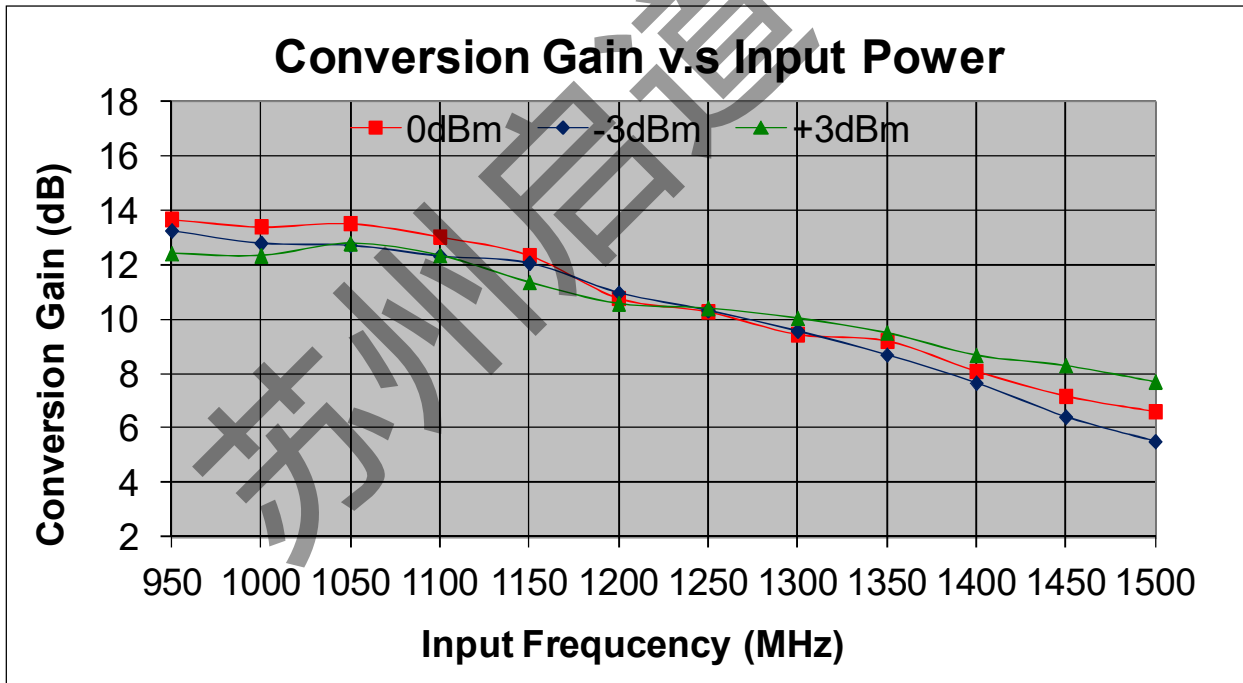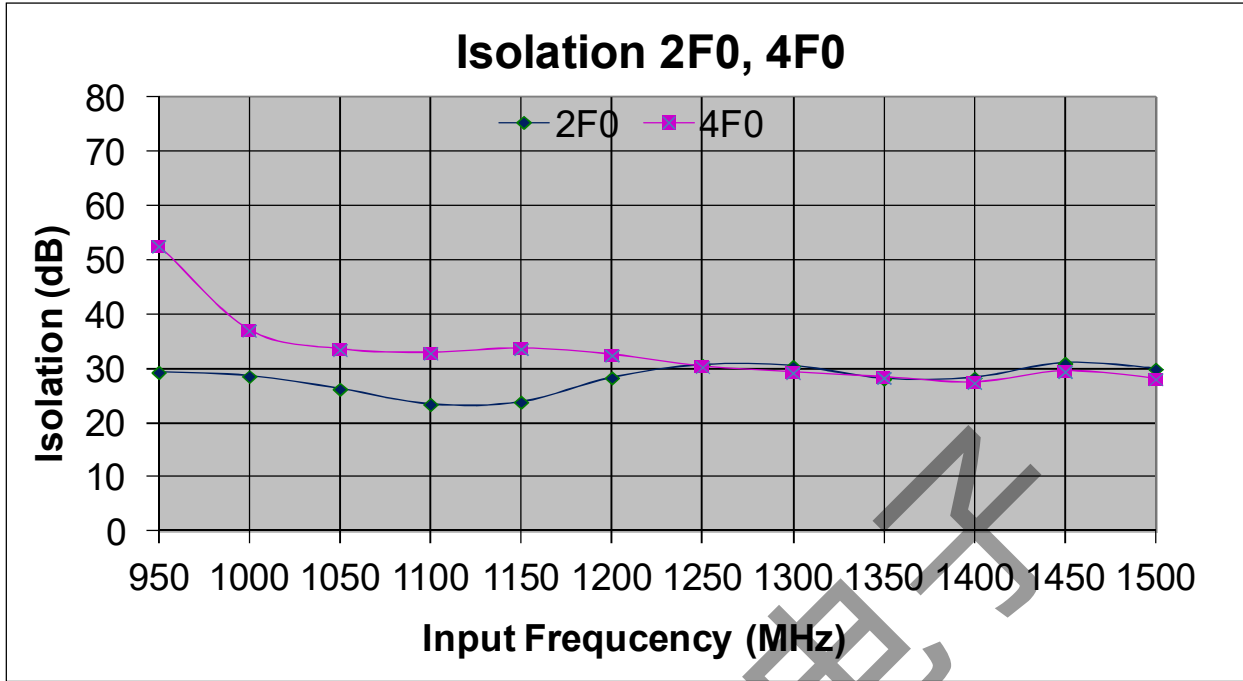


FMR Series

950-1500MHz Input Frequency Tripler

Return Loss S11 vs Frequency

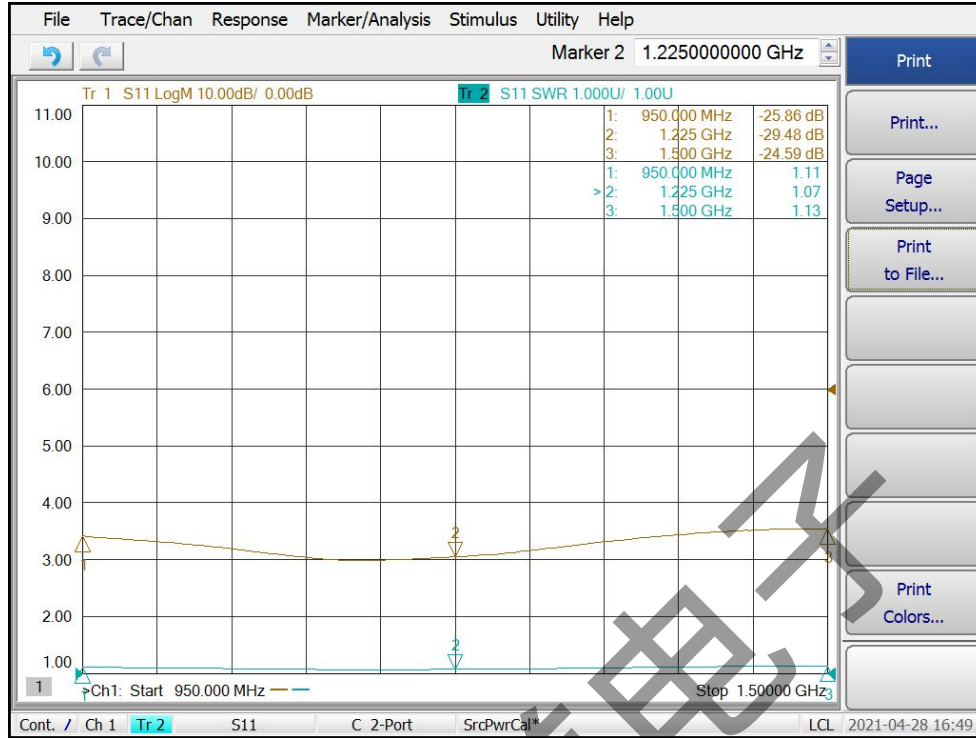

Return Loss S22 vs Frequency

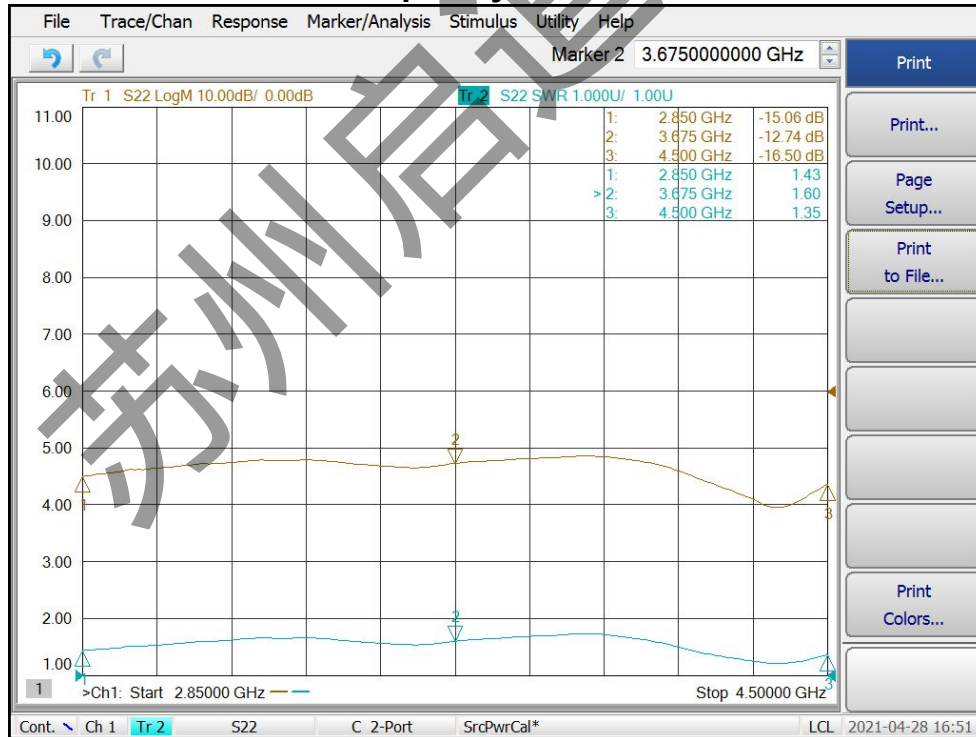

## FMR Series

## 950-1500MHz Input Frequency Tripler


### Absolute Maximum Ratings

Parameter	Absolute Maximum
RF Input Power	+23dBm
Supply DC Voltage	+25V
Operating Temperature	-40 °C to +85 °C
Storage Temperature	-55 °C to +105 °C

### ESD Sensitive Material



### Outline

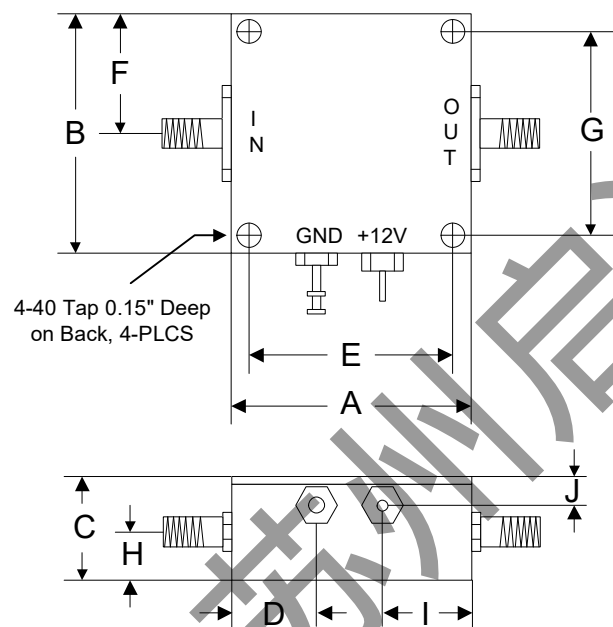

	A	B	C	D	E	F	G	H	I	J
Inch	1.250	1.250	0.563	0.450	1.000	0.625	1.000	0.250	0.500	0.187
mm	31.75	31.75	14.29	11.43	25.40	15.88	25.40	6.35	12.70	4.76