


型号 Cable Type : LU600

LU系列低损耗超柔电缆

LU Series Low Loss Ultra Flexible Cable

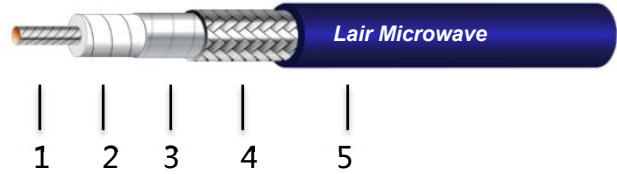

结构 Construction	材料 Materials	尺寸 O.D (mm)
1.中心导体 Center Conductor	镀银铜绞线 Stranded Silvered Copper	1.44
2.绝缘层 Dielectric	低密度聚四氟乙烯 Low Density PTFE	4.15
3.内屏蔽层 Inner Shield	镀银铜带绕包 Silvered Copper Tape Wrapping	4.35
4.外屏蔽层 Outer Shield	镀银铜丝编织 Braided Silvered Copper Wire	4.80
5.护套 Jacket	紫色聚氨酯 Purple PUR	6.00

电气性能 Electrical Specifications	
阻抗 Cable Impedance	50 Ω
速率 Velocity	76%
屏蔽效率 Shielding Effectiveness	>90 dB
耐电压 Voltage Withstanding	1700 V DC
工作频率 Operating Frequency	DC-26.5 GHz

机械环境性能 Mechanical & Environmental Specifications	
重量 Weight	72 g/m
弯曲半径, 静态 Bend Radius, static	30 mm
弯曲半径, 动态 Bend Radius, dynamic	60 mm
温度范围 Temperature Range	-55 ~ +85 °C

衰减典型值 Attenuation (Typical Value @ 25°C & Sea Level)		
频率 Frequency (MHz)	功率 Power (W)	衰减 Attenuation (dB/m)
300	324	0.16
1000	175	0.29
3000	99	0.51
6000	68	0.74
8500	57	0.89
12400	46	1.09
18000	37	1.34
26500	30	1.67