

MGA Series

1.5GHz –1.7GHz 1W RF Amplifier

Features


- Frequency Range: 1.5 – 1.7GHz
- Gain: 12dB
- P_{1dB}: +30dBm
- IP3: +43.5dBm
- Noise Figure: 6dB
- Input/Output VSWR: 1.4:1
- DC Power: 5V
- SMA Connector

Performance Tested @ 1.6GHz

Description

MGA-1600 is +30dBm (1W) output RF Amplifier operates with frequency range from 1.5GHz to 1.7GHz.

Picture

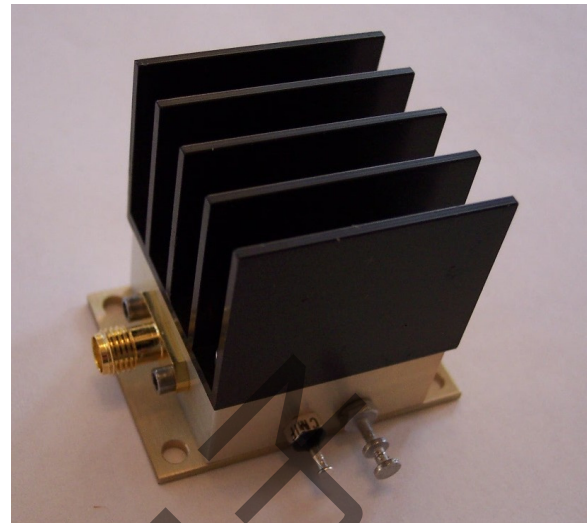







Electrical Specifications @ +25 °C, Z_S = Z_L = 50 Ω, V_{CC}=+5V

Parameter	Unit	Minimum	Typical	Maximum
Frequency Range	GHz	1.5		1.7
Small Signal Gain	f = 1.5GHz	dB	12.0	
	f = 1.6GHz	dB	12.5	
	f = 1.7GHz	dB	12.3	
Gain Flatness	dB		± 1.0	
P _{1dB}	dBm		+30	
OIP3	dBm		+43.5	
Noise Figure at 1.75GHz	dB		6.0	
Reverse Isolation	dB		-27	
VSWR	f = 1.6GHz		1.4:1	
	Input		1.4:1	
	Output		1.4:1	
DC Power Supply	V	4.5	5.0	5.5
Supply Current	Quiescent (no RF)	mA	410	
	@ P _{out} = +30dBm	mA	750	

MGA Series

1.5GHz –1.7GHz 1W RF Amplifier







Typical Performance @ +25 °C

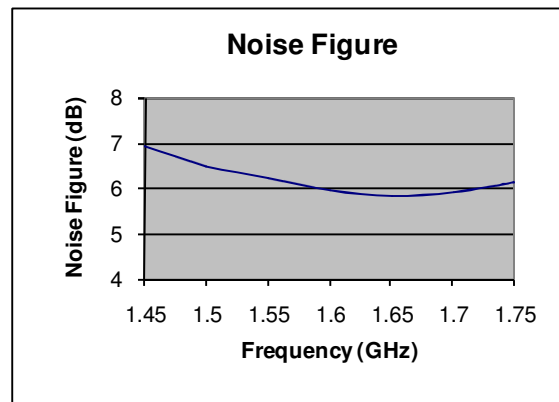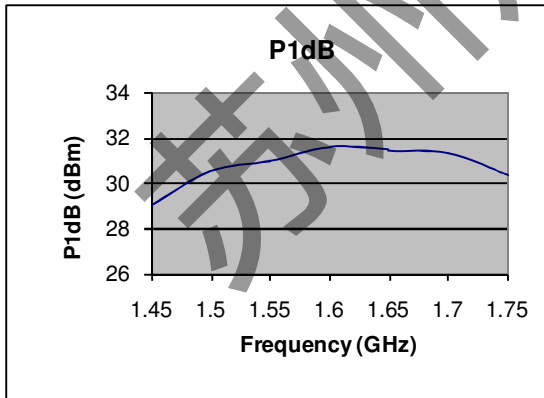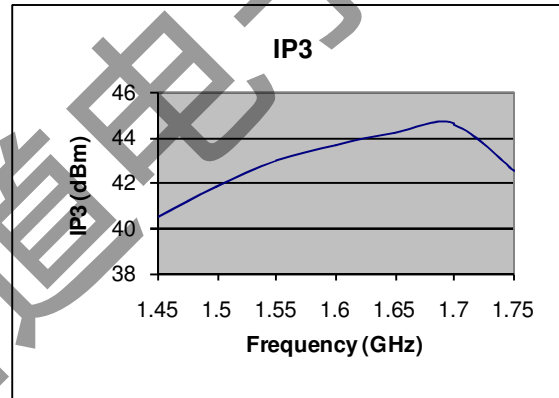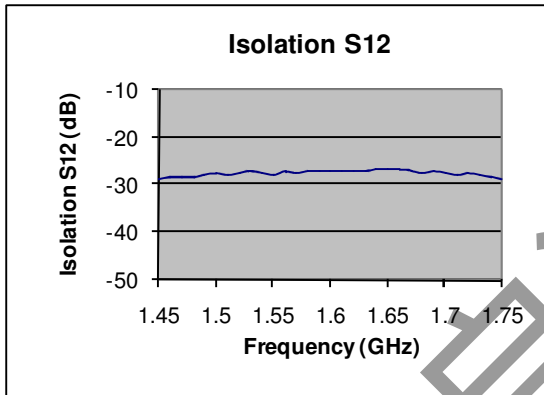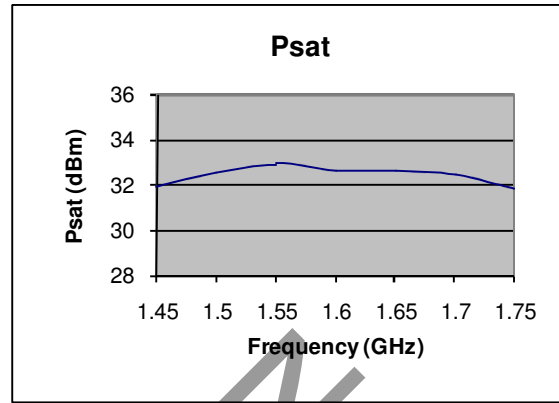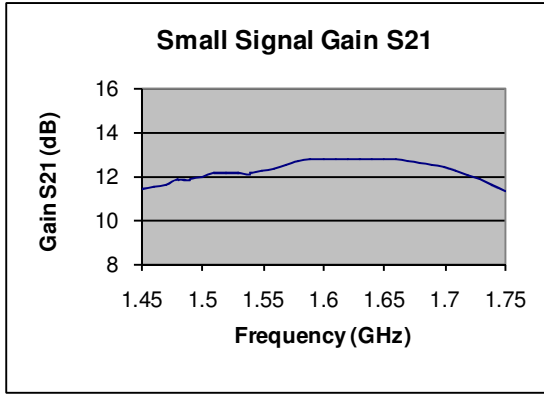

MGA Series

1.5GHz –1.7GHz 1W RF Amplifier

Typical Performance @ +25 °C

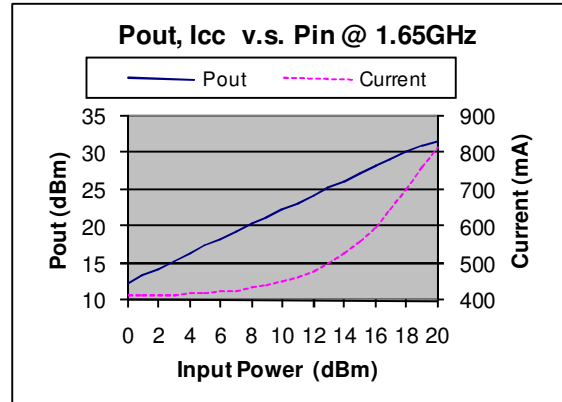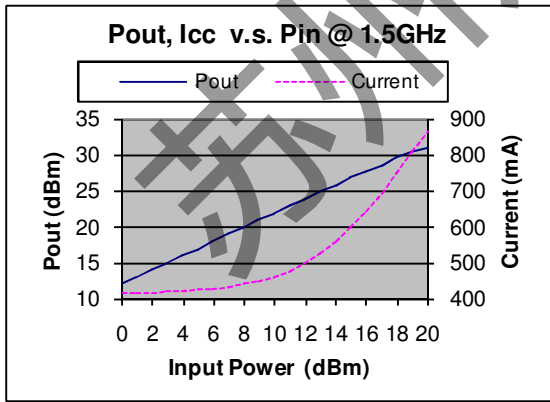
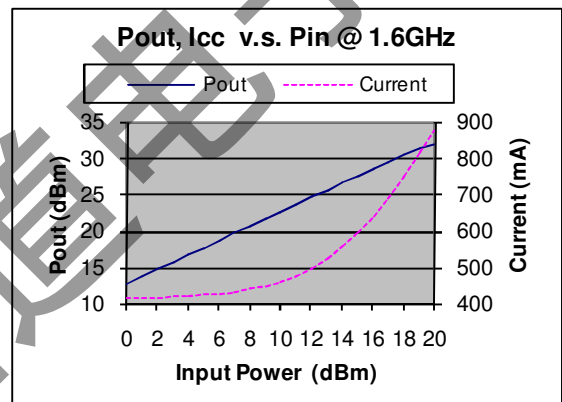
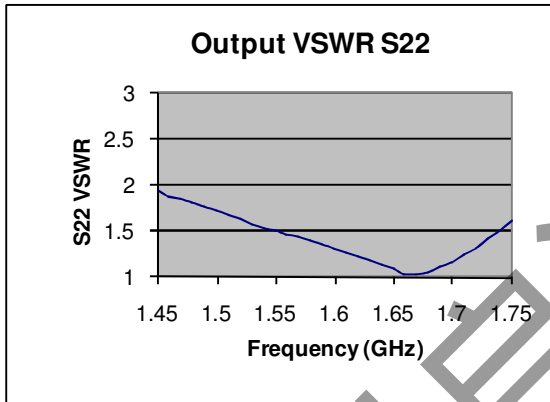
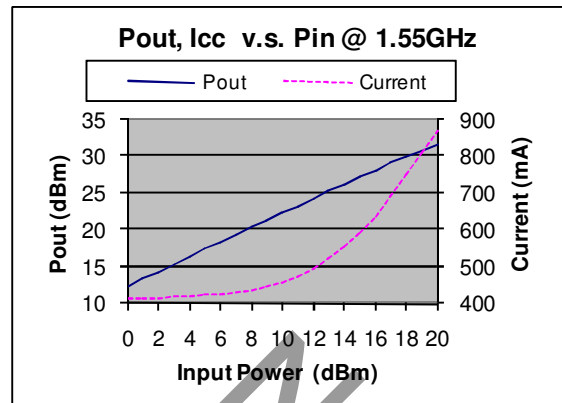
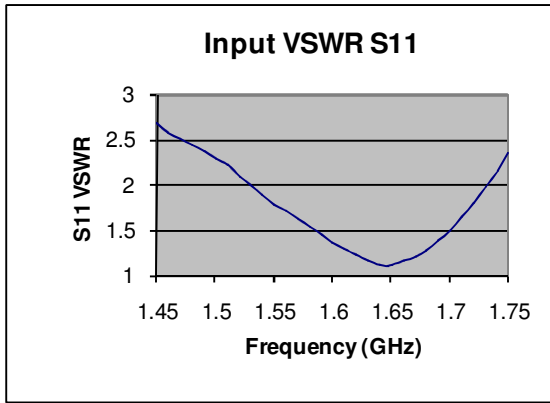




MGA Series

1.5GHz –1.7GHz 1W RF Amplifier

Typical Performance @ +25 °C

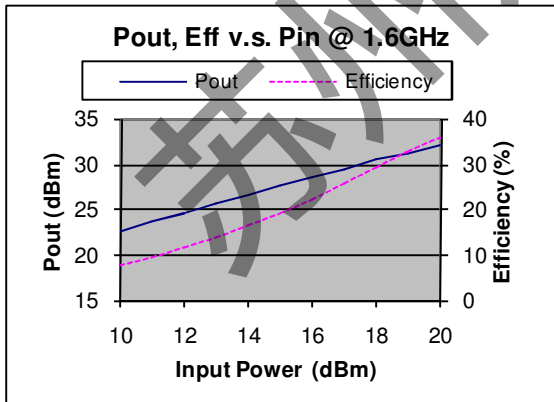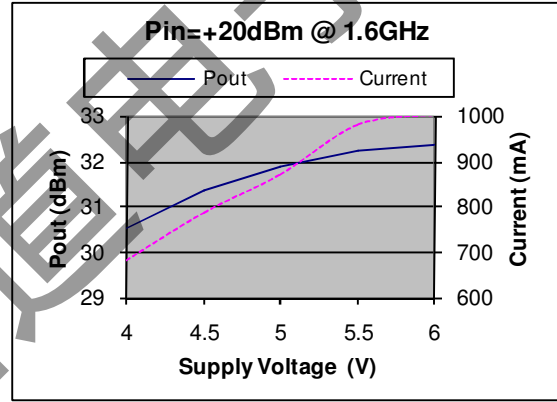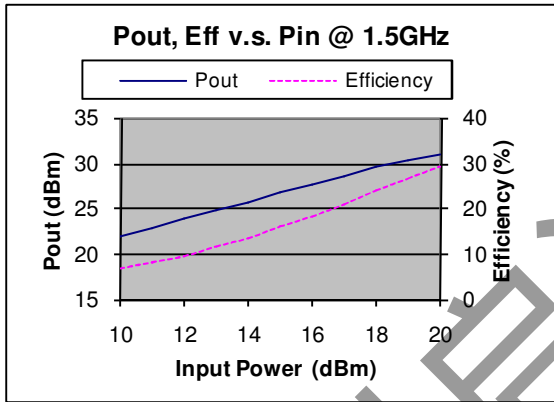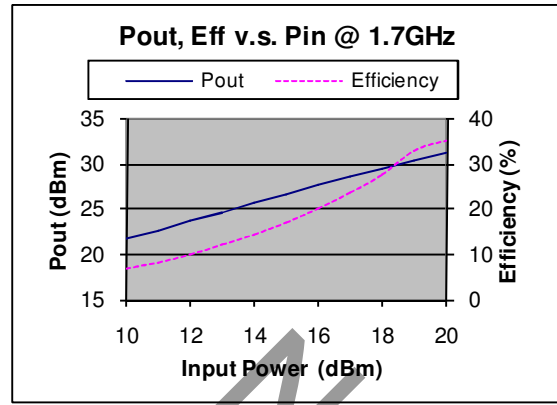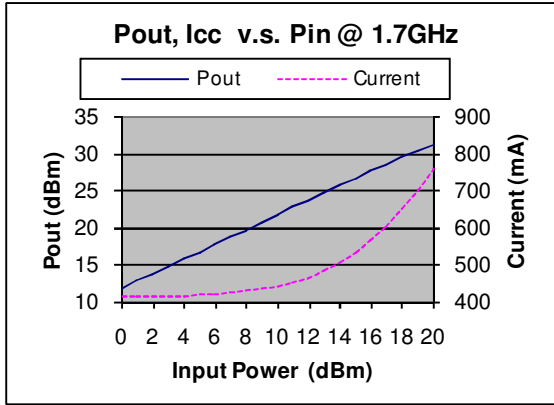


MGA Series

1.5GHz –1.7GHz 1W RF Amplifier

Absolute Maximum Ratings

Parameter	Absolute Maximum
RF Input Power	+25dBm
Supply Voltage	+6V
Operating Temperature	-40 °C to +85 °C
Storage Temperature	-55 °C to +100 °C

Outline

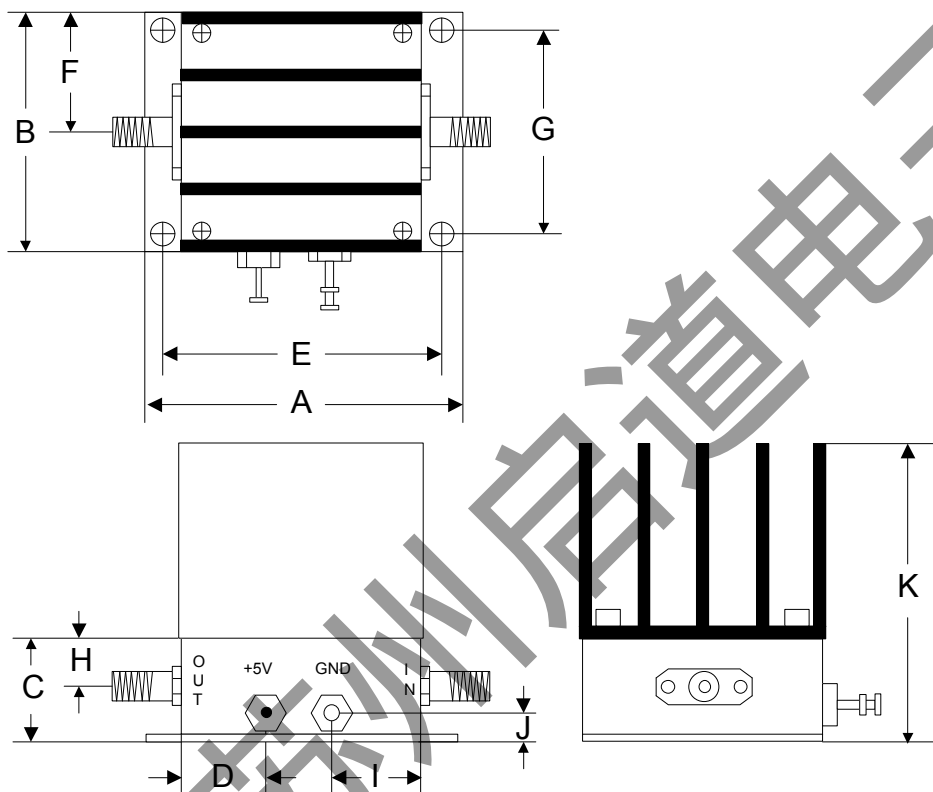

	A	B	C	D	E	F	G	H	I	J	K
Inch	1.250	1.250	0.563	0.450	1.000	0.625	1.000	0.250	0.500	0.187	1.563
mm	31.75	31.75	14.29	11.43	25.40	15.88	25.40	6.35	12.70	4.76	39.70