

MGA Series

50MHz –4GHz RF Amplifier

Features


- Frequency Range:0.05–4GHz
- Gain: 27dB
- P_{1dB} : +20dBm
- IP3: +35dBm
- Noise Figure: 4.7dB
- Input/Output VSWR: 1.6/1.8
- DC Power: 12V
- SMA Connector

Performance Tested @ 2.0GHz

Description

MGA-4-27 is 27dB Gain RF Amplifier operates with frequency range from 50MHz to 4GHz.

Picture

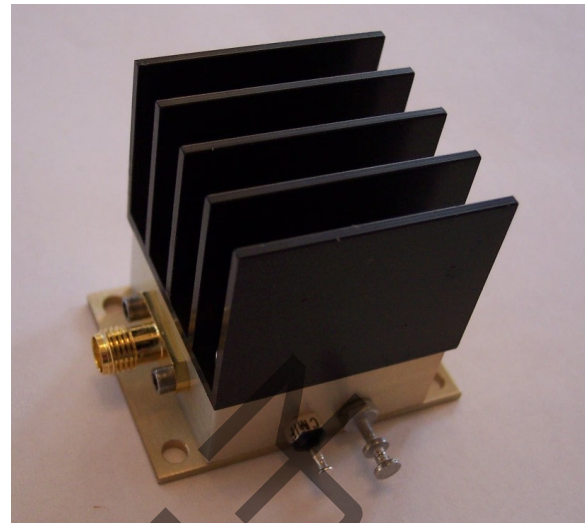







Electrical Specifications @ +25 °C, $Z_S = Z_L = 50 \Omega$, $V_{CC}=+12V$

Parameter	Unit	Minimum	Typical	Maximum
Frequency Range	GHz	0.05		4.0
Small Signal Gain	f = 50MHz	dB	27	
	f = 100MHz	dB	29	
	f = 500MHz	dB	29	
	f = 2.0GHz	dB	29	
	f = 4.0GHz	dB	28	
Gain Flatness	dB		± 1.5	
P_{1dB} at 2.0GHz	dBm		+20	
OIP3 at 2.0GHz	dBm		+35	
Noise Figure at 2.0GHz	dB		4.7	
Reverse Isolation	dB		-37	
VSWR f = 2.0GHz	Input		1.6:1	
	Output		1.8:1	
DC Power Supply	V	11	12	15
Supply Current Quiescent (no RF)	mA		160	

MGA Series

50MHz –4GHz RF Amplifier







Typical Performance @ +25 °C

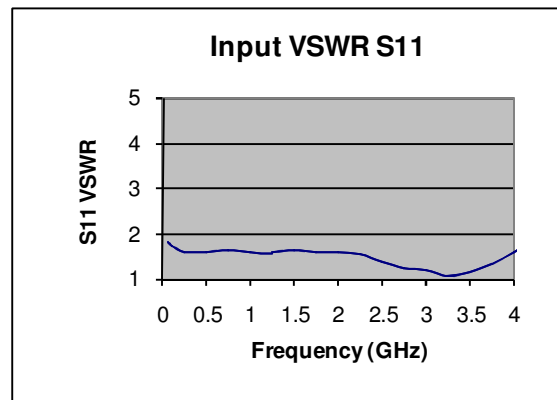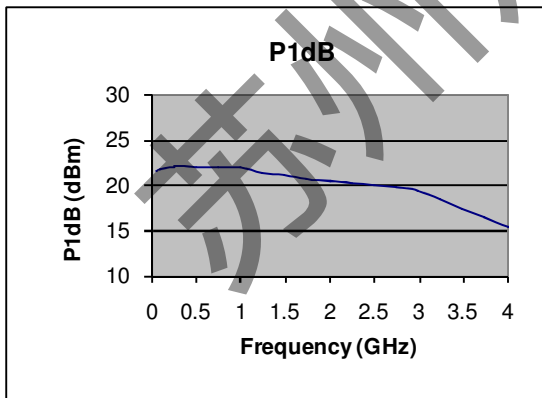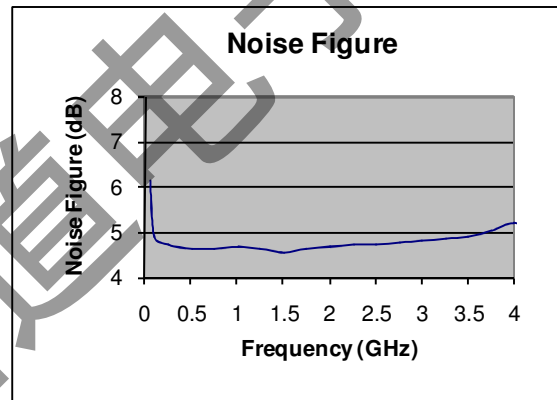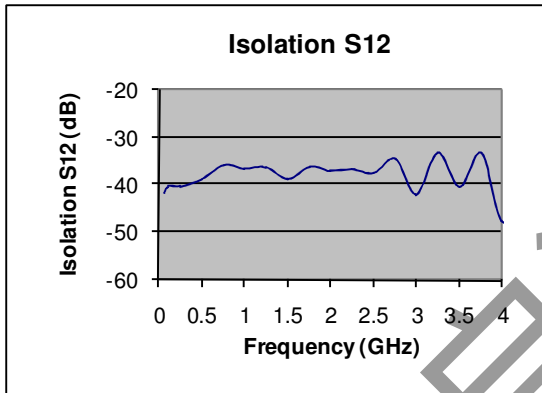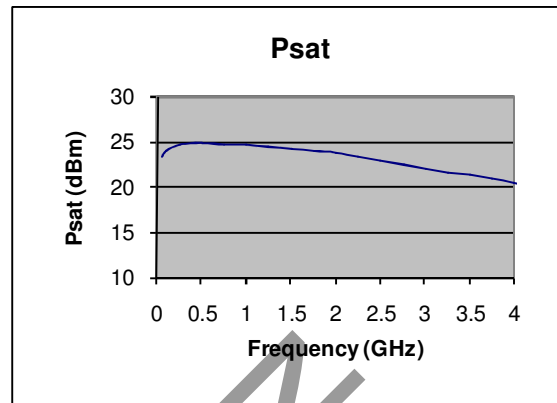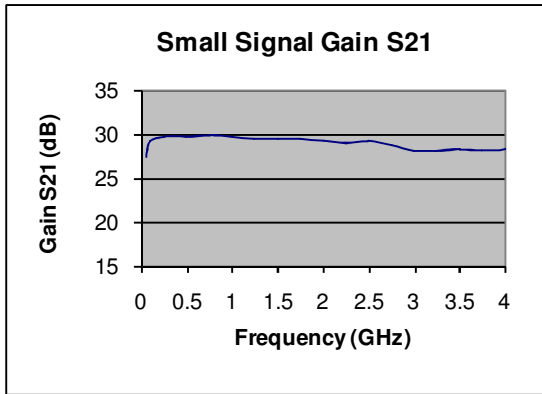

MGA Series

50MHz –4GHz RF Amplifier

Typical Performance @ +25 °C

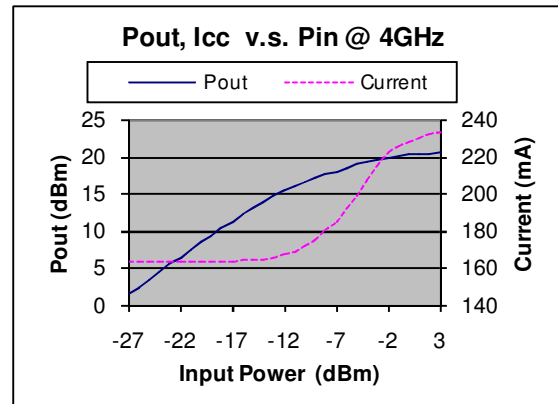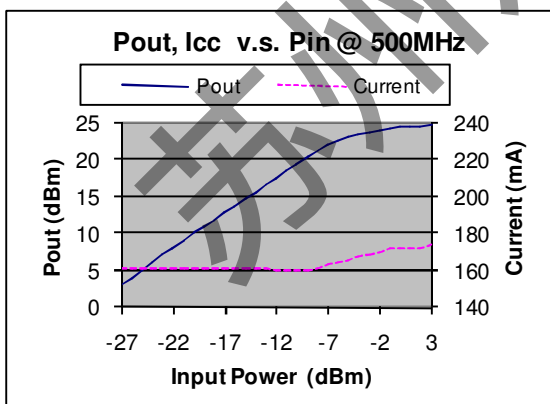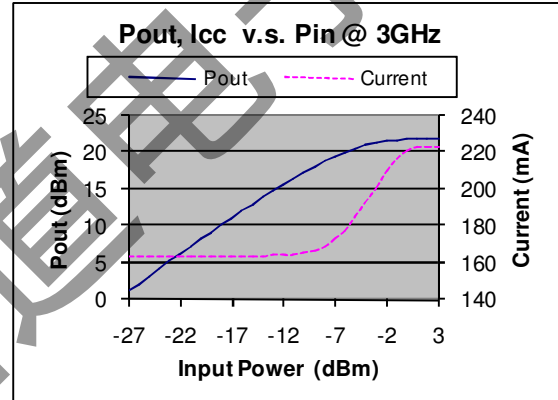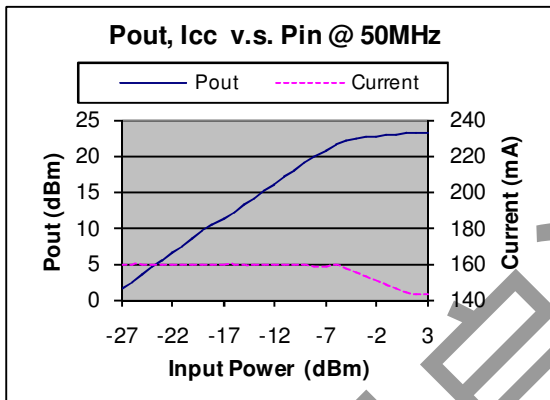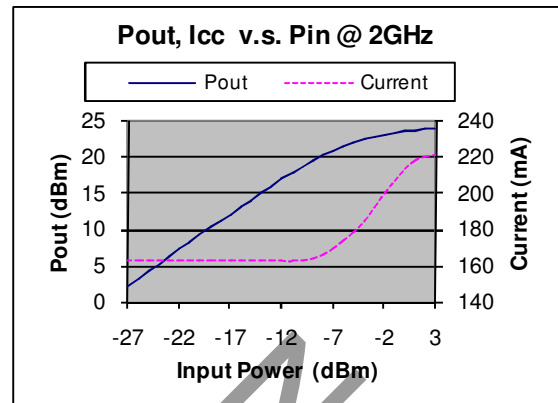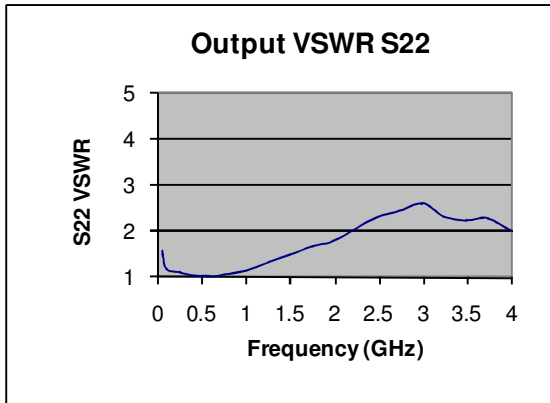


MGA Series

50MHz –4GHz RF Amplifier

Absolute Maximum Ratings

Parameter	Absolute Maximum
RF Input Power	+10dBm
Supply Voltage	+25V
Operating Temperature	-40 °C to +85 °C
Storage Temperature	-55 °C to +100 °C

Outline

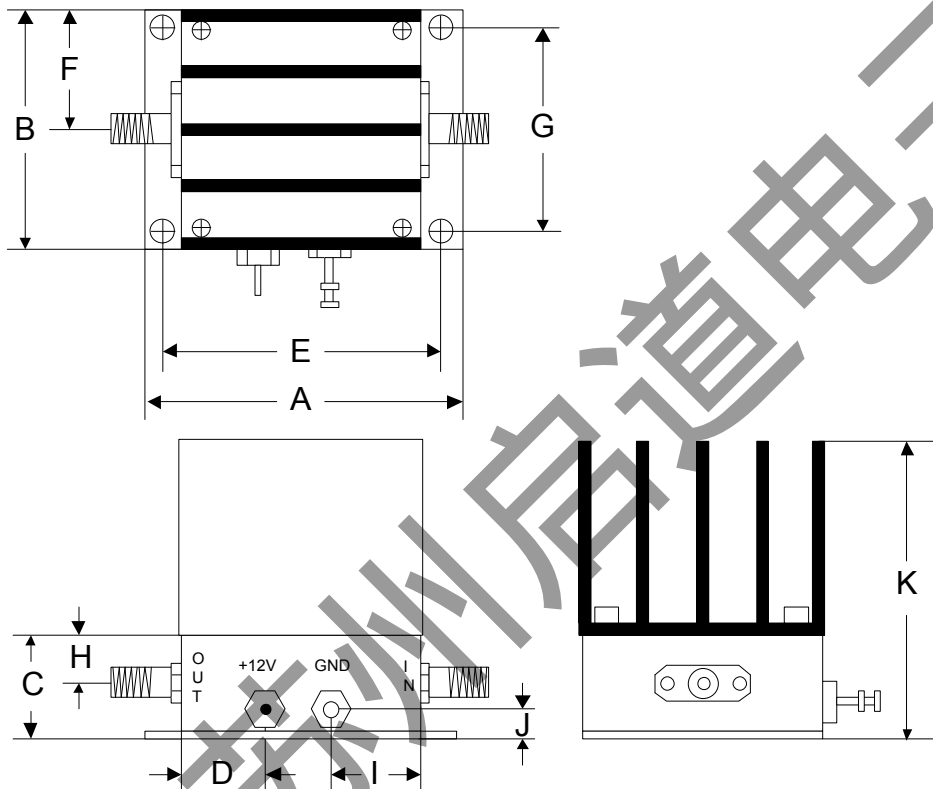

	A	B	C	D	E	F	G	H	I	J	K
Inch	1.250	1.250	0.563	0.450	1.000	0.625	1.000	0.250	0.500	0.187	1.563
mm	31.75	31.75	14.29	11.43	25.40	15.88	25.40	6.35	12.70	4.76	39.70