


## MPA Series

## 902-928MHz 5W RF Power Amplifier

### Features

- Frequency Range: 902-928MHz
- Gain: 40dB
- P<sub>out</sub>: +37dBm
- IP3: +47dBm
- Noise Figure: 6dB
- DC Power: 9V
- SMA Connector

### Picture

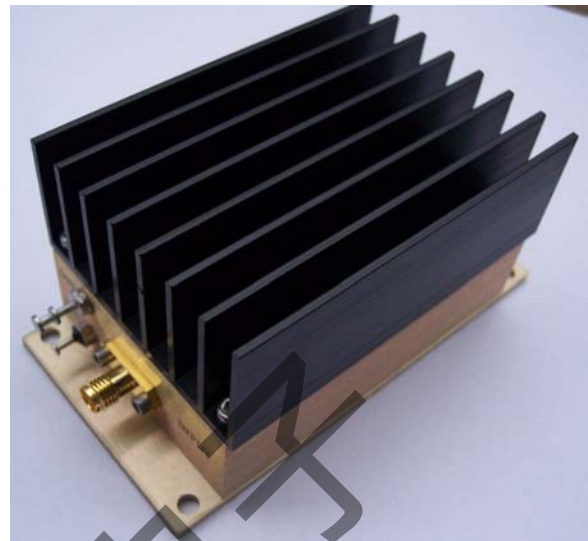

### Description

MPA-0915 is a 5Watt (+37dBm) output RF Power Amplifier operating from single 9V DC power supply with frequency range from 902MHz to 928MHz ISM band.







### Electrical Specifications @ +25 °C, Z<sub>s</sub> = Z<sub>L</sub> = 50 Ω, V<sub>cc</sub> = 9V

Parameter	Unit	Minimum	Typical	Maximum
Frequency Range	MHz	902		928
Small Signal Gain	dB	40	41	
Output Power P <sub>out</sub> @ P <sub>in</sub> = -3dBm	dBm		+37	
IP3	dBm		+47	
Reverse Isolation	dB		-75	
Noise Figure	dB		6.0	
Efficiency at P <sub>out</sub> = +37dBm	%		33	
VSWR				
Input			1.3:1	
Output			1.5:1	
DC Power Supply	V		9	
Supply Current	mA		1650	
Size (Excluding SMA Connector)	inch	3.750" x 2.000" x 1.813"		
Weight	Oz.	8		

**MPA Series**

**902-928MHz 5W RF Power Amplifier**



**Typical Performance @ +25 °C**

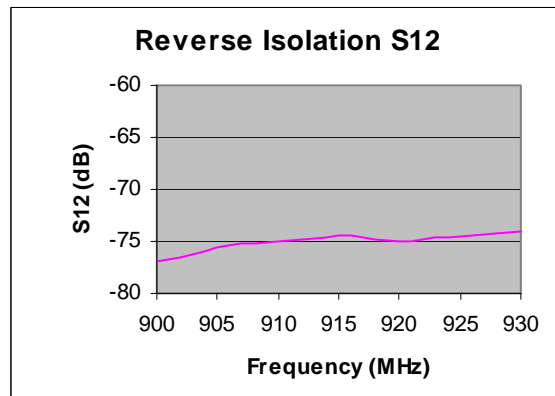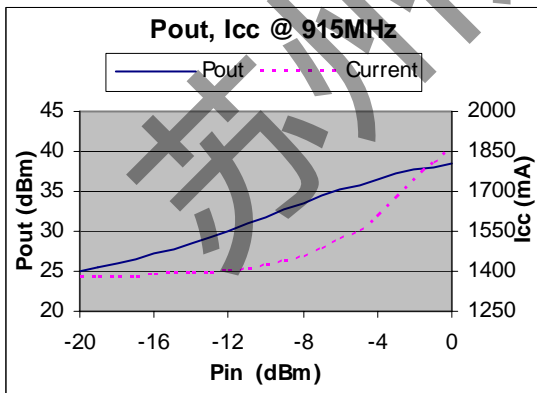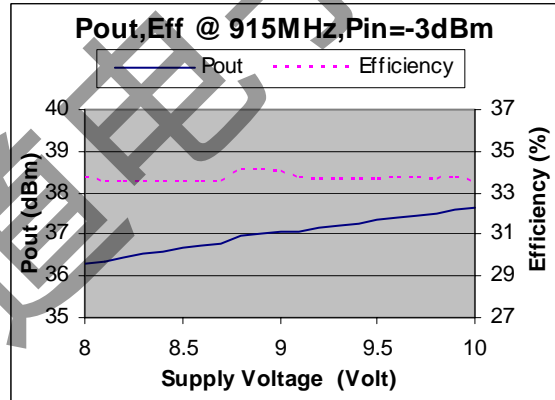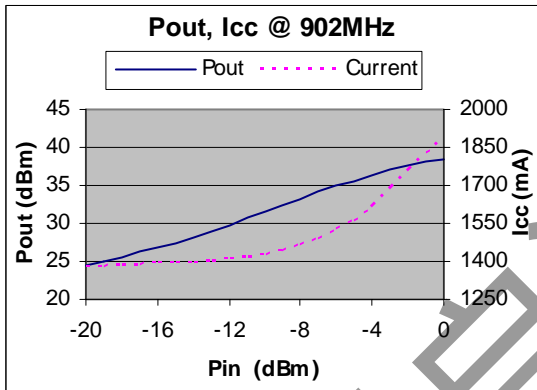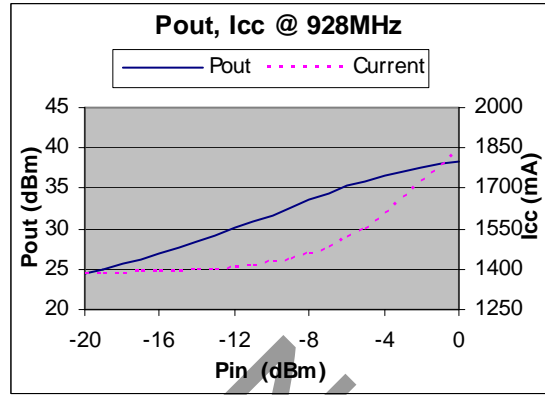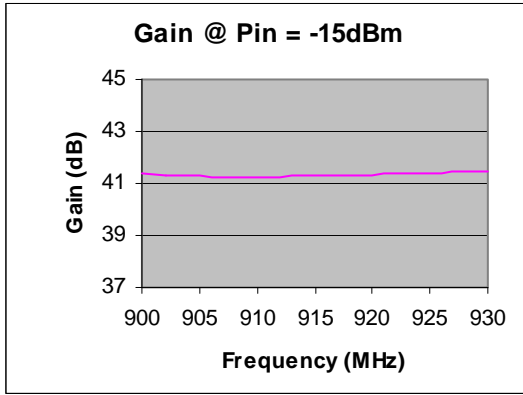

## MPA Series

## 902-928MHz 5W RF Power Amplifier

### Typical Performance @ +25 °C

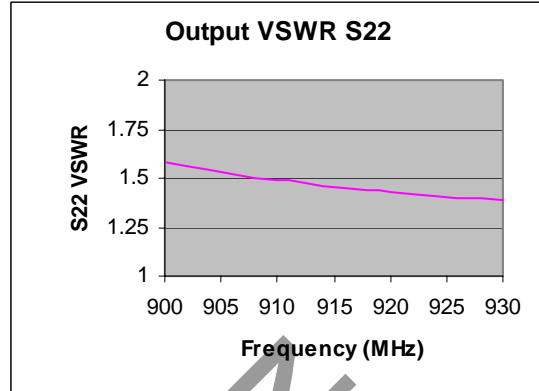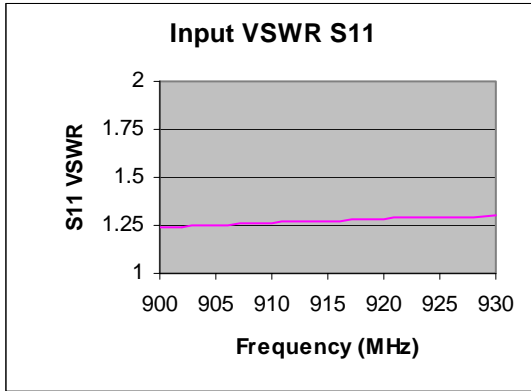

苏州启道电子


## MPA Series

## 902-928MHz 5W RF Power Amplifier

### Absolute Maximum Ratings

Parameter	Absolute Maximum
RF Input Power	+10dBm
Supply Voltage	+12V
Operating Temperature	-30 °C to +65 °C
Storage Temperature	-55 °C to +100 °C

### Outline

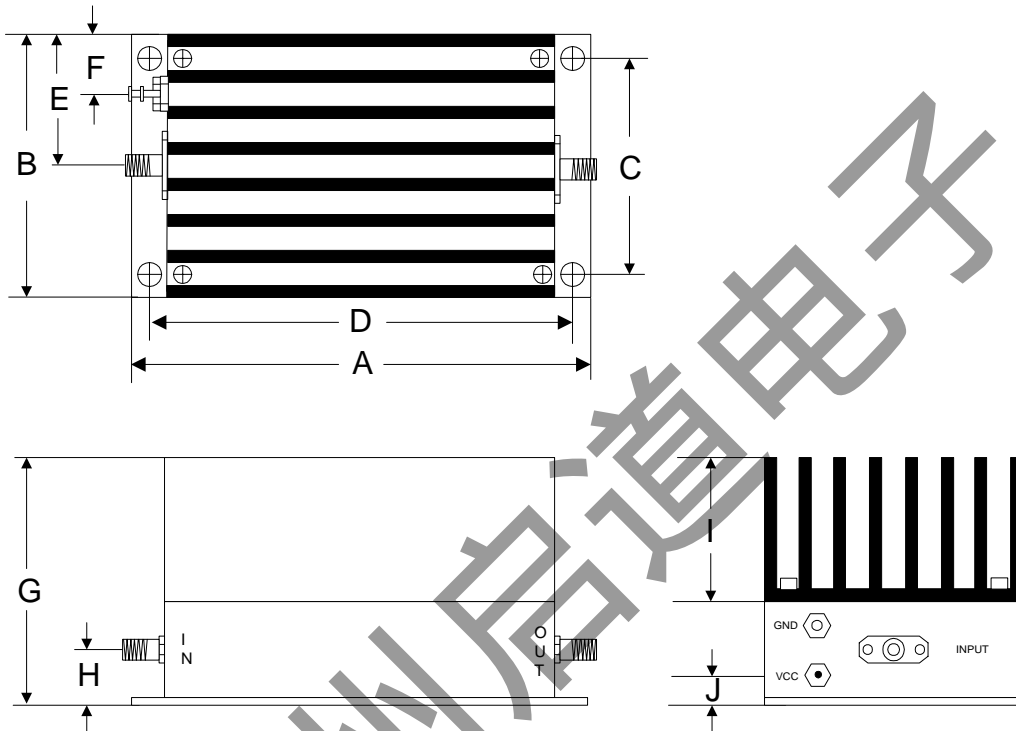

	A	B	C	D	E	F	G	H	I	J
Inch	3.750	2.000	1.750	3.400	1.000	0.400	1.813	0.375	1.000	0.238
mm	92.25	50.80	44.45	86.36	25.40	10.16	46.05	9.53	25.40	6.03