

## MPA Series

## 30-2200MHz 1W RF Power Amplifier

### Features


- Frequency Range: 30-2200MHz
- Gain: 30dB
- P<sub>1dB</sub>: +30dBm (1Watt)
- IP3: +43dBm
- Noise Figure: 4.5dB
- DC Power: +12V
- DC Reverse Protected
- SMA Connector

Performance measured @ 1100MHz

### Description

MPA-22-30 is a 1Watt (+30dBm) output RF Power Amplifier operating from single 12V DC power supply with frequency from 30MHz to 2200MHz.

### Picture

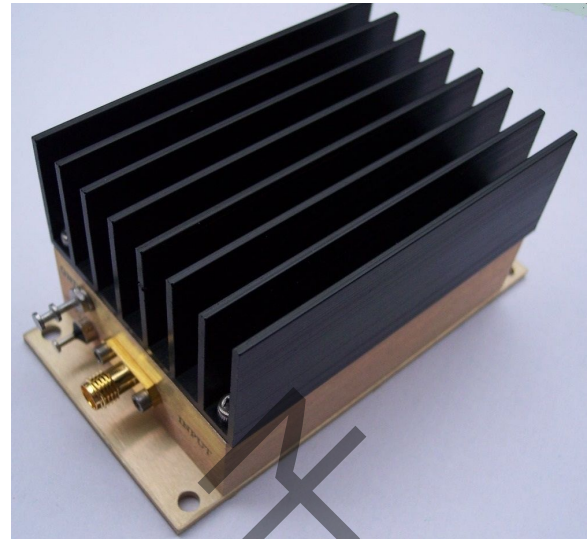


### Electrical Specifications @ +25°C, Z<sub>IN</sub> = Z<sub>OUT</sub> = 50Ω, DC Supply = +12V

Parameter	Unit	Minimum	Typical	Maximum	
Frequency Range	MHz	30		2200	
Small Signal Gain S <sub>21</sub>	f = 30MHz	dB	30	31	
	f = 500MHz	dB	30	31	
	f = 1100MHz	dB	30	31	
	f = 1600MHz	dB	30	31	
	f = 2200MHz	dB	30	31	
Gain Flatness	dB		± 1.0	± 1.5	
Output Power P <sub>1dB</sub>	f = 1100MHz	dBm	+29	+30	
Output IP3	f = 1100MHz	dBm	+41	+43	
Reverse Isolation S <sub>12</sub>	f = 1100MHz	dB	-40	-50	
Noise Figure	f = 1100MHz	dB	4.5	5.5	
VSWR	Input VSWR S <sub>11</sub>	f = 1100MHz		1.6:1	2.0:1
	Output VSWR S <sub>22</sub>	f = 1100MHz		1.2:1	2.0:1
DC Power Supply	V	11	12	13	
DC Current	mA		430	480	


MPA Series

30-2200MHz 1W RF Power Amplifier

Gain S21, Isolation S12, Return Loss S11, S22 vs Frequency

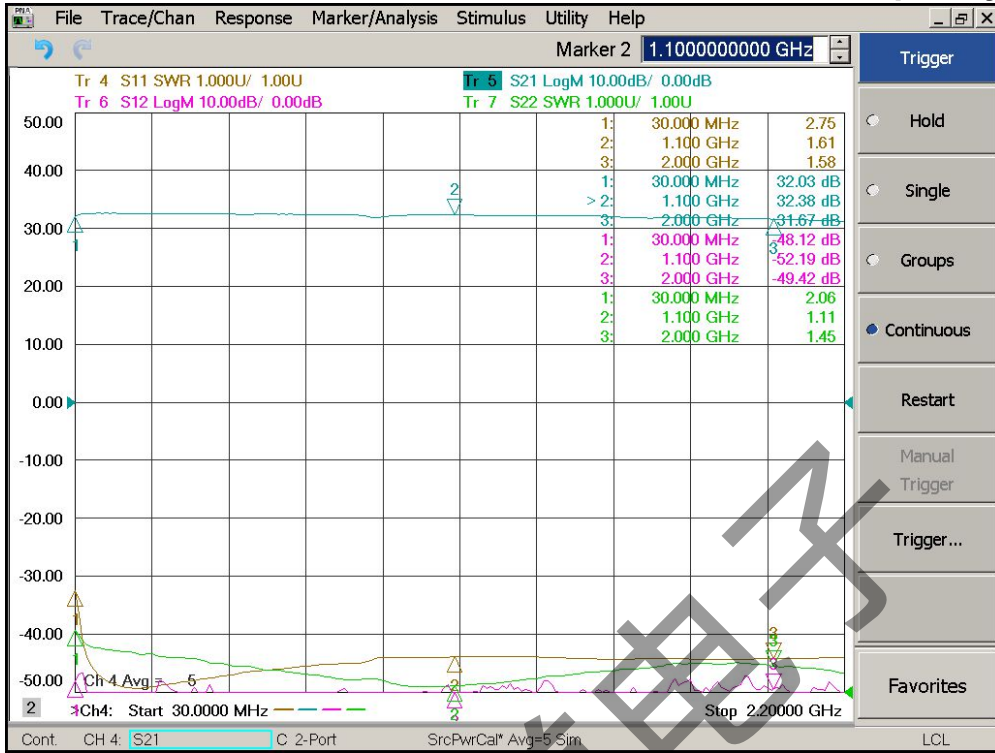


Noise Figure vs Frequency

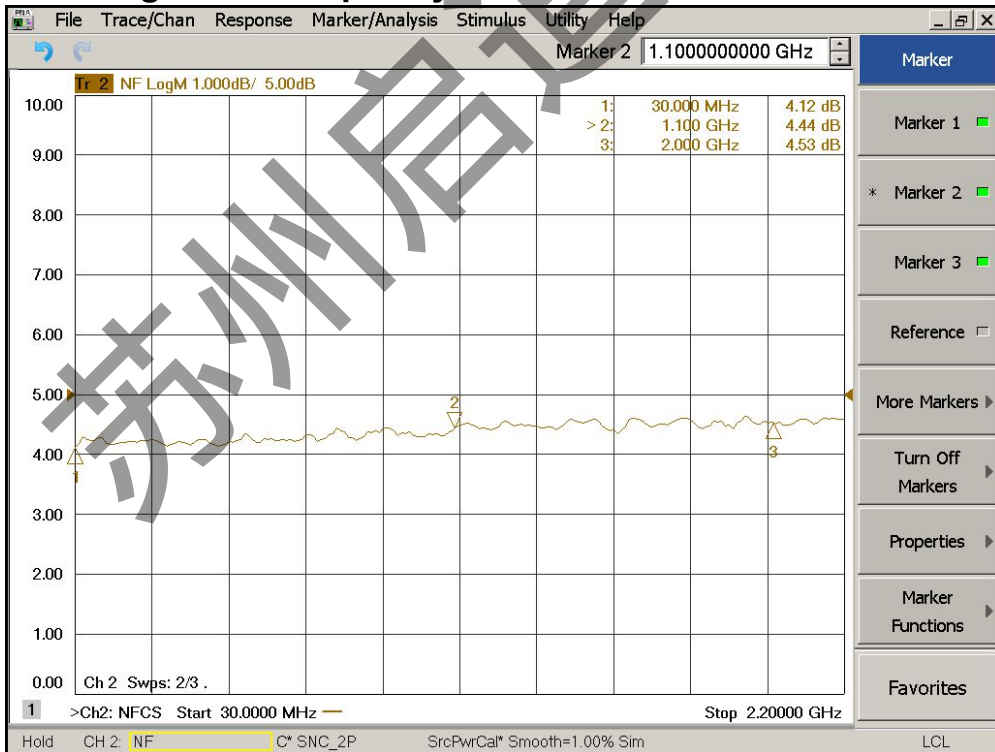


**MPA Series**

**30-2200MHz 1W RF Power Amplifier**

**Output P1dB vs Frequency**

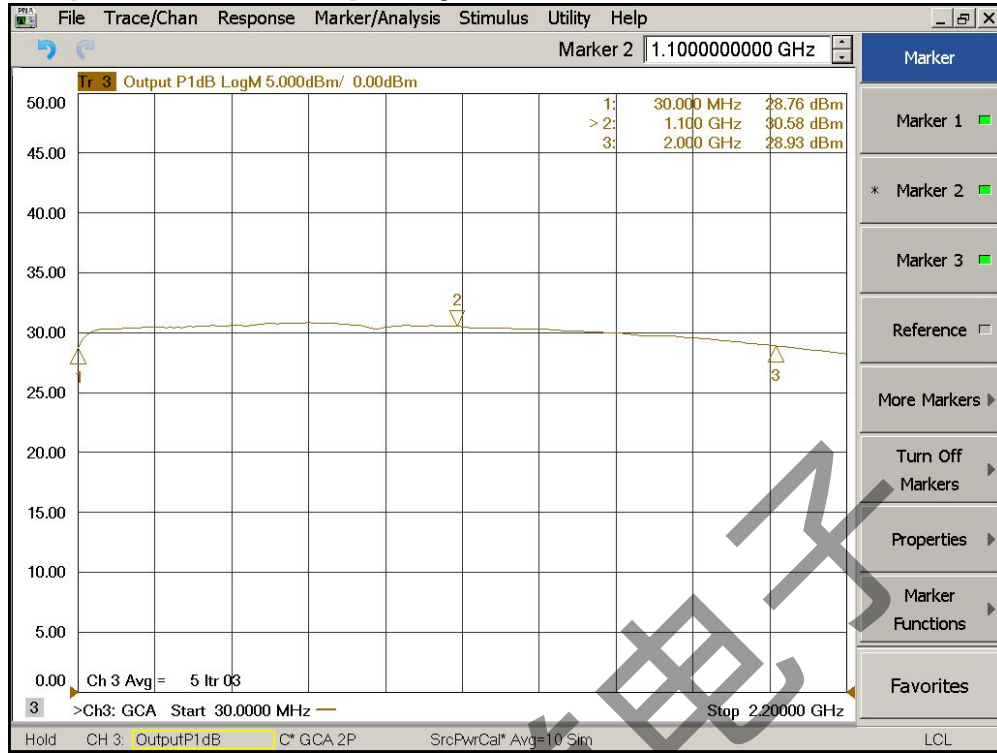

**Output IP3 vs Frequency**

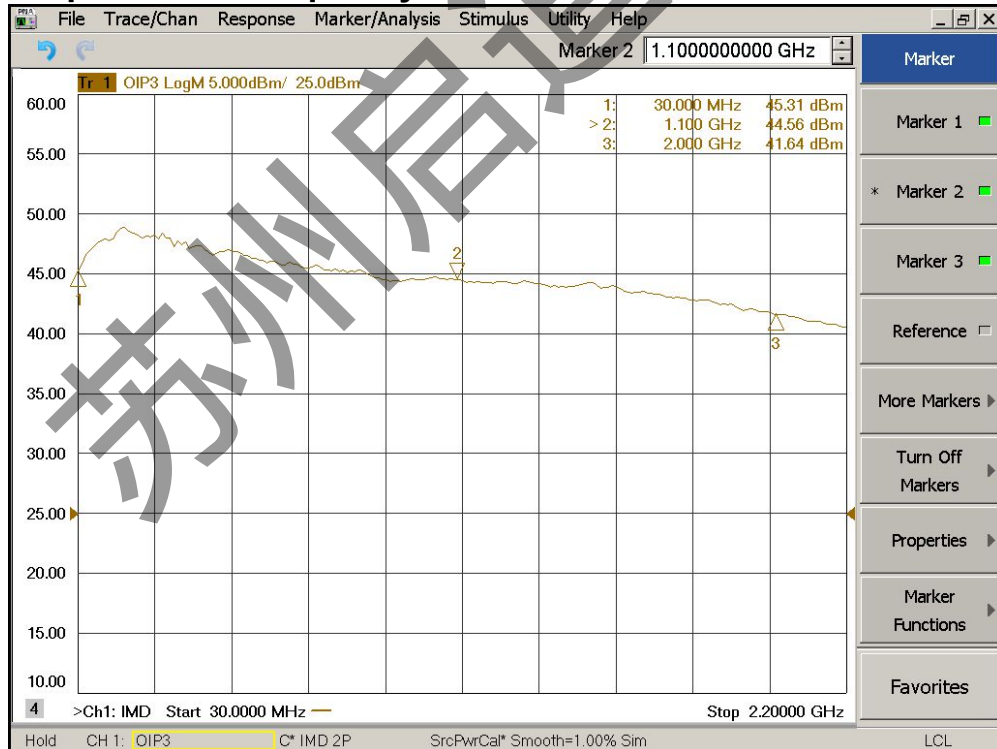

## MPA Series

## 30-2200MHz 1W RF Power Amplifier


### Absolute Maximum Ratings

Parameter	Absolute Maximum
RF Input Power	+12dBm
DC Supply Voltage	+13V
Operating Temperature	-40 °C to +70 °C
Storage Temperature	-55 °C to +125 °C

### ESD Sensitive Material



### Outline

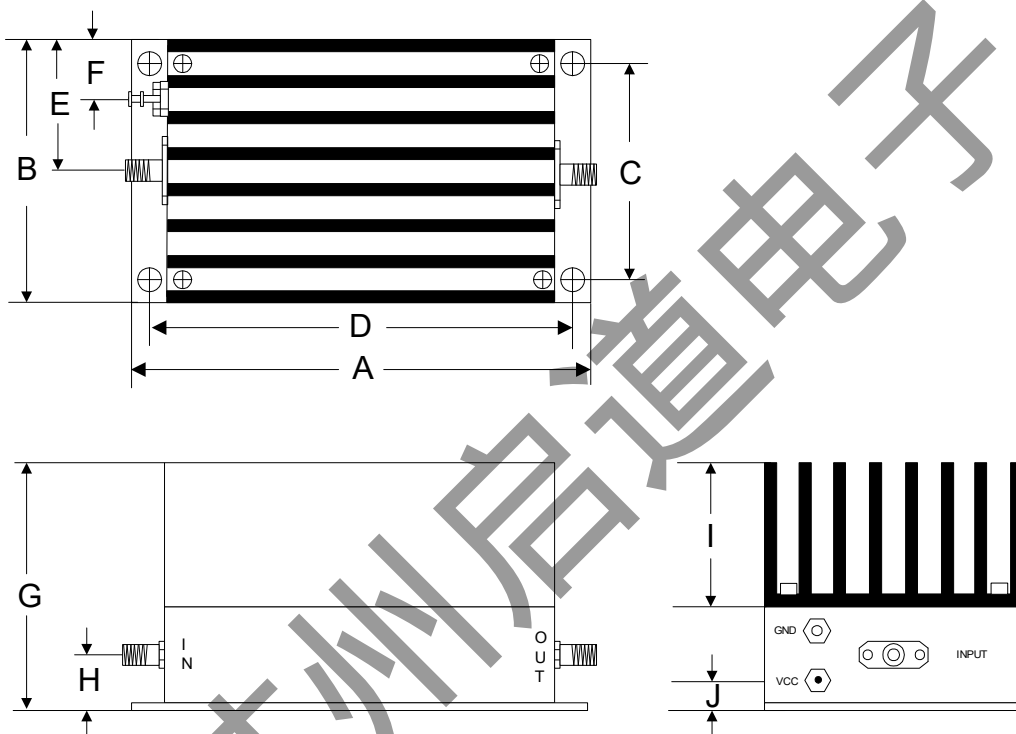

	A	B	C	D	E	F	G	H	I	J
Inch	3.750	2.000	1.750	3.400	1.000	0.400	1.813	0.375	1.000	0.238
mm	92.25	50.80	44.45	86.36	25.40	10.16	46.05	9.53	25.40	6.03